

Dantherm[®]
CLIMATE SOLUTIONS




RESIDENTIAL VENTILATION

RCC RANGE

ENERGY-EFFICIENT CLIMATE CONTROL SOLUTIONS FOR YOUR HOME

DANTHERMGROUP

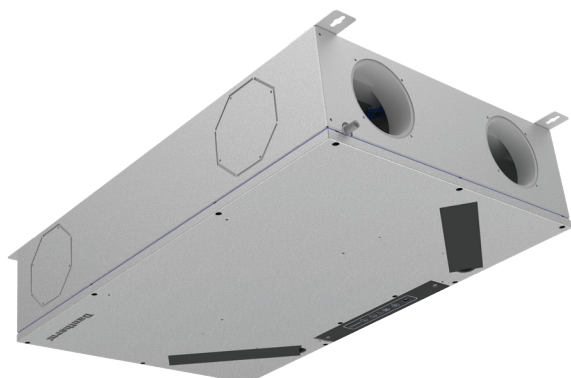

Ideal for small residential areas

The RCC range has been designed to cover ventilation needs in apartments and other residential areas of up to 80m² with a particular focus on installation flexibility, safety and ease of maintenance.


One unit fits all installation scenarios

Unique to the residential ventilation market, the RCC offers a stunning 96 different ways of connecting ducts to the unit. 6 different mounting options each offering 16 duct connection combinations. (A) setups are the standard configuration, (B) can be configured on site.

The air flow direction can be electronically swapped, thereby making it possible to route the connected ducts either to the right or to the left. This means that the supply air duct connections can be placed either on the right or to the left hand side of the unit.

Moreover, the factory-mounted duct seals on the side of the unit can easily be removed using a side cutter and then used to seal off other ducts not to be used.

This means that you can use the same unit for all installation scenarios. There is no risk of ordering units that have been preconfigured incorrectly for your needs.

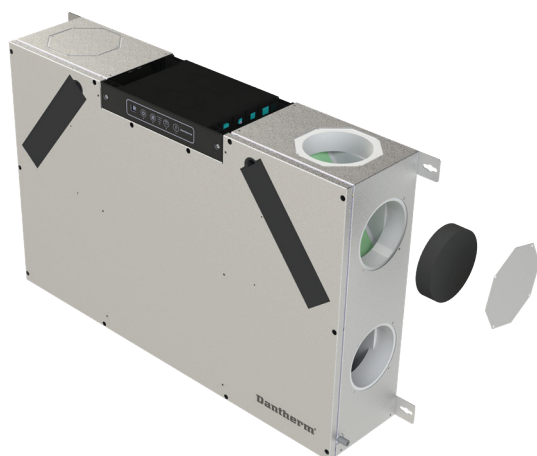

**DUCT SEALS CAN BE MOVED TO
FIT YOUR SETUP**

Ceiling and wall-mounted units


RCC RANGE

Dantherm
CLIMATE SOLUTIONS


(A) LEFT SET-UPS
Standard configuration

(B) RIGHT SET-UPS
Can be configured on site


(A) UNDER CEILING

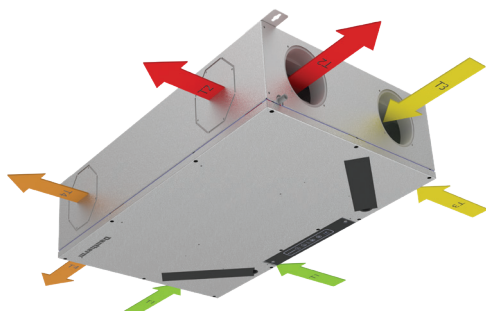


(B) UNDER CEILING

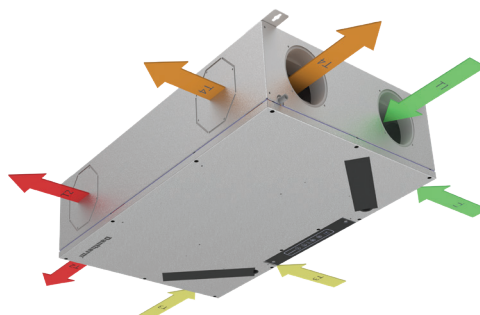


(A) WALL, VERTICAL

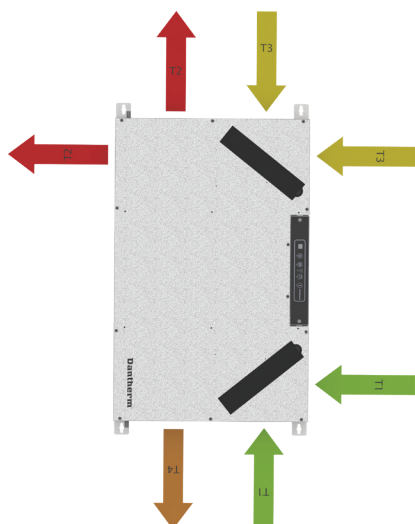


(B) WALL, VERTICAL

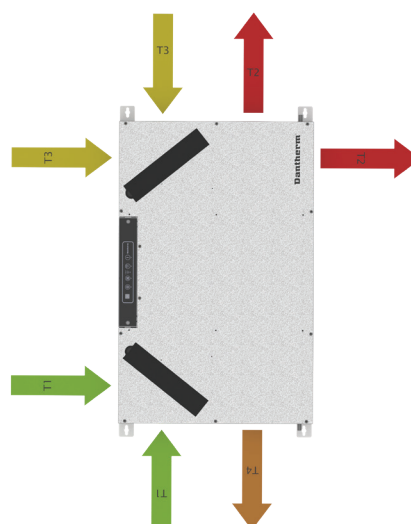


(A) WALL, HORIZONTAL

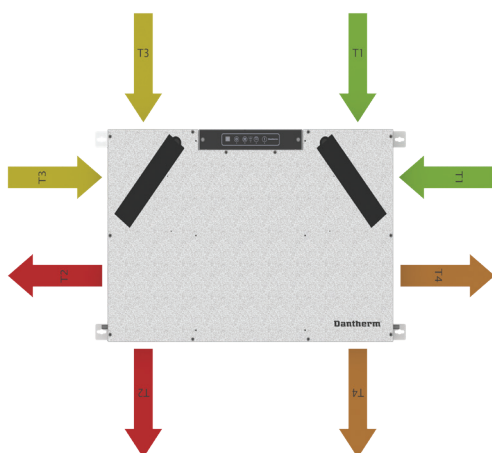

(B) WALL, HORIZONTAL

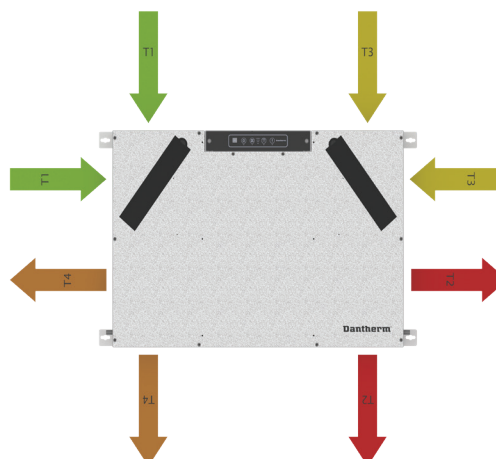

- T1 Outdoor air
- T2 Supply air
- T3 Extract air
- T4 Exhaust air

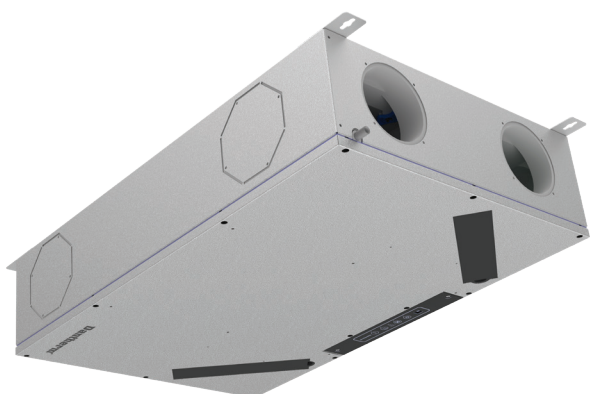**RCC 220P2**

The RCC 220P2 is a uniquely flexible and compact residential ventilation unit for small houses and apartments. Based on an ingenious design, it is delivered as a true plug and play solution with a built-in control panel and all necessary parts for on-site installation.

Requiring just 200mm installation headroom, it is perfect for installation in suspended ceilings, on (or inside!) walls or closets. The air flows can be electronically swapped, so the same unit can be mounted with inside/outside ducts connected to either the right or left hand side as needed.

The RCC units come with a galvanised metal surface and are either delivered packaged individually one unit on a pallet in a cardboard box or in a variant packaged four units on a pallet to minimise use of packaging in consideration of the environment and to ease handling at building sites.



- Demand-controlled ventilation with integrated humidity sensor, reducing power consumption at times with low ventilation demands
- Summer mode in which the supply fan is stopped to reduce power consumption. Open windows will supply cooler outside air
- Automatic free-cooling via the integrated bypass function that lets in cool night air on hot days to help maintain comfortable temperatures through the day
- Fireplace mode, creating a temporary inside overpressure to enhance chimney functionality
- High-efficiency heat recovery
- EC fan motors with extremely low energy consumption (low SPI)
- Requires no more than 200mm installation headroom
- Highly customisable units with the option to add a high variety of internal as well as external accessories
- Two humidity sensors to facilitate switching from left/right setup
- Prepared for easy mounting of condensate pump

Third party testing and certifications

Code	Description
PHI	Passivhaus certified
DIBt	Certified by the German Institute of Construction Technology
PCDB listed SAP App. Q	Pending (listed in the UK database for balanced whole-house mechanical ventilation with heat recovery)
ErP	Compliant with EU regulations for Eco-design
Nordic Swan Ecolabel	Listed in the Nordic Swan database for products suitable for Ecolabelled buildings

Specifications	Units		RCC 220P2
Maximum achievable flow at 100Pa	V100Pa	m³/h	220
Maximum declared flow at 100Pa	V _{max.rated}	m³/h	120
Recommended operating range	V	m³/h	45-130
Operating range DIBt	V _{DIBt}	m³/h	45-120
Operating range Passivhaus at 100Pa	V _{PHI}	m³/h	45-115
EN 13141-7 reference flow at 50Pa	V _{REF}	m³/h	84

Performance

Thermal efficiency in accordance PHI

h_{SUP}

%

84 (preliminary)

Thermal efficiency in accordance with EN13141-7

h_{SUP}

%

86

Leakage (external and internal) in accordance with EN 13141-7

<2% (Class A1)

Filters in accordance with ISO16890

-

-

ISO Coarse 75% (optional on supply: ePM1>50%)

Filters in accordance with EN779

-

-

G4 (optional on supply: F7)

Installation surrounding temperature

t_{SURR}

°C

+12 to +45

Outdoor temperature without preheater installed

t_{ODA}

°C

-12* to +45

Outdoor temperature with preheater installed

t_{ODA}

°C

-20 to +45

Maximum absolute humidity of extract air

x

g/kg

10

Cabinet

Dimensions (without wall bracket)

w x h x d

mm

580 x 200 x 900

Spigots/duct connections

Ø

mm

8 x Ø125 – female

Weight

kg

17

Heat conductivity – polystyrene insulation

l

W/mK

0.031

Heat transfer coefficient – polystyrene insulation

U

W/m²K

U<1

Fire classification of the polystyrene insulation

-

DIN 4102-1 class B2
EN 13501 class E

Drainage hose (accessory)

Ø

"

1/2

Cabinet colour

RAL

-

Alu-zinc

Electrical

Voltage

U

V

230

Maximum power consumption (without/with preheater)

P

W

173/1073

Frequency

f

Hz

50

Protection class


-






-

IP21

* The use of preheating coil is recommended at outdoor temperature -3°C to ensure balanced operation.

Capacity and SPI curves with G4/G4 filters

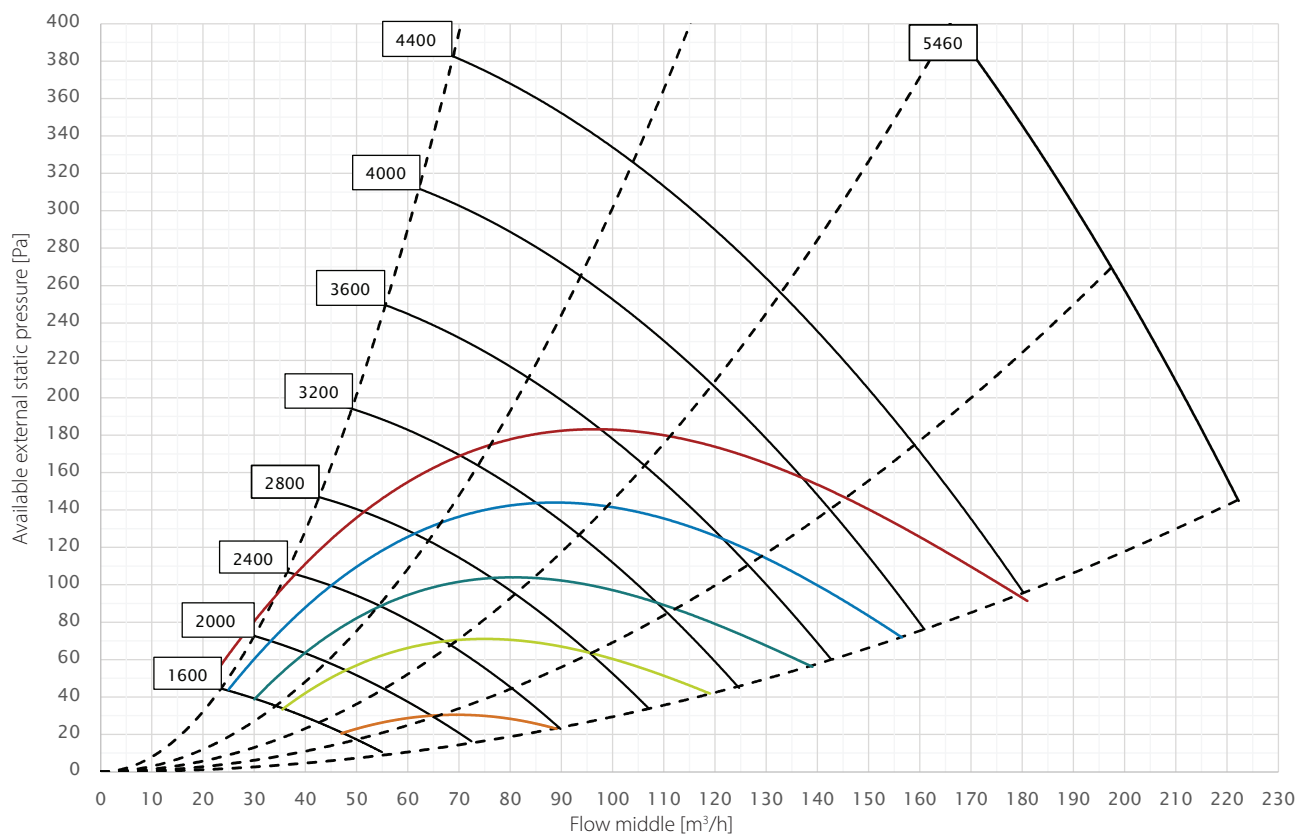

					
SFP/SPI/SEL*	0.45 W/m³/h	0.39 W/m³/h	0.33 W/m³/h	0.28 W/m³/h	0.22 W/m³/h
	1620 J/m³	1400 J/m³	1200 J/m³	1000 J/m³	800 J/m³
	1.62 W/l/s	1.40 W/l/s	1.20 W/l/s	1.0 W/l/s	0.80 W/l/s


* SFP/SPI/SEL includes power consumption of both fans.

Thermal efficiency curves

Legend

- Thermal efficiency according to EN 13141-7 (dry)
Operational conditions: outdoor air: 7°C, 85% RH; extract air: 20°C, 37% RH

All values at balanced flow

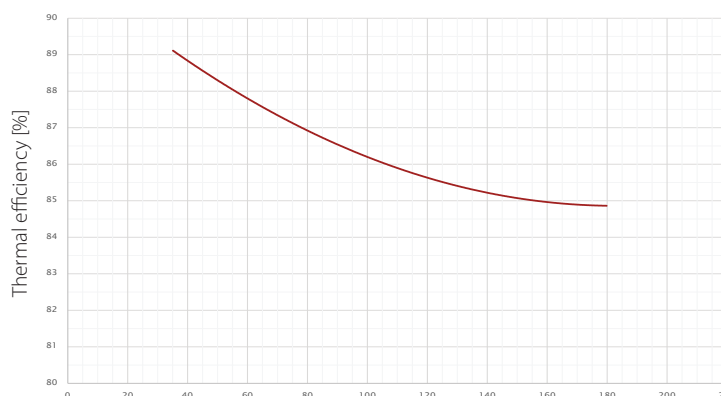

Sound power level (Lw) – ducts

RPM	Duct	[dB(A)]								
		63Hz	125Hz	250Hz	500Hz	1kHz	2kHz	4kHz	8kHz	Total
800	supply/exhaust	12.9	23.6	19.3	19.8	26.3	13.4	-	-	29.4
	extract/outdoor	-	15.3	12.6	-	14.8	10.8	-	-	19.7
1200	supply/exhaust	18.3	39.2	29.8	30.8	30.6	21.2	11.4	-	40.7
	extract/outdoor	10.0	33.1	19.7	19.0	16.8	11.2	-	-	33.6
1600	supply/exhaust	23.8	41.4	44.5	41.8	37.0	28.7	22.8	-	48.0
	extract/outdoor	18.3	33.5	33.6	29.4	20.6	12.5	12.7	-	37.9
2000	supply/exhaust	28.0	43.4	52.3	46.5	41.8	35.9	30.7	-	54.1
	extract/outdoor	22.6	34.5	38.8	33.4	24.6	15.0	14.6	-	41.4
2200	supply/exhaust	29.0	44.4	54.7	47.7	44.8	38.6	34.6	13.4	56.3
	extract/outdoor	24.4	34.9	41.4	34.9	26.3	17.0	15.4	-	43.2
2400	supply/exhaust	31.4	45.4	57.2	49.5	47.6	42.7	38.5	20.6	58.6
	extract/outdoor	26.2	35.4	44.8	37.0	27.8	20.2	16.0	-	46.0
2600	supply/exhaust	33.0	46.6	59.0	52.3	49.5	44.3	40.9	21.7	60.5
	extract/outdoor	28.5	37.3	45.1	38.1	28.9	21.8	16.0	-	46.6
2800	supply/exhaust	34.7	47.9	60.7	55.2	51.4	45.9	43.3	22.7	62.5
	extract/outdoor	29.7	38.7	50.8	43.6	31.7	25.4	16.5	-	51.9
3000	supply/exhaust	36.8	48.9	60.7	61.8	53.0	47.7	45.1	25.4	64.9
	extract/outdoor	32.5	40.4	50.9	49.5	34.5	26.4	18.8	-	53.6
3200	supply/exhaust	38.9	49.9	60.7	68.4	54.6	49.6	47.0	27.5	69.4
	extract/outdoor	32.8	41.9	50.9	56.4	39.8	29.2	20.7	-	57.7
3400	supply/exhaust	39.3	50.9	60.7	69.7	56.3	51.2	48.9	29.8	70.5
	extract/outdoor	37.4	43.4	50.9	57.5	40.5	30.5	23.2	-	58.6
3600	supply/exhaust	39.7	51.9	60.7	71.0	58.0	52.8	50.8	31.9	71.7
	extract/outdoor	37.4	43.5	51.0	58.5	41.2	32.6	24.9	-	59.4
4000	supply/exhaust	43.8	54.4	60.7	71.0	60.8	56.2	53.8	35.6	72.0
	extract/outdoor	37.8	43.6	51.1	60.6	41.3	35.8	28.2	-	61.2
4400	supply/exhaust	43.9	56.2	60.7	71.0	62.5	58.5	56.7	39.3	72.3
	extract/outdoor	38.1	51.0	51.2	60.6	41.8	38.7	31.0	-	61.6
5400	supply/exhaust	47.2	57.4	60.7	71.0	68.3	63.3	61.5	45.5	73.9
	extract/outdoor	39.6	51.0	51.3	60.6	49.2	44.5	37.1	19.8	61.9


Sound pressure level (Lp) – cabinet
1m distance

	Without background noise weighted [dB(A)]								
RPM	63Hz	125Hz	250Hz	500Hz	1kHz	2kHz	4kHz	8kHz	Total
800	-	-	14.1	16.3	4.7	13.8	13.7	12.9	21.4
1200	-	10.6	16.0	22.1	22.1	18.9	13.7	13.8	27.0
1600	-	12.0	17.3	23.8	22.1	24.1	20.2	18.6	29.6
2000	-	15.1	22.4	30.0	25.5	25.6	21.2	18.9	33.3
2200	-	16.4	24.5	32.5	27.5	25.6	22.4	19.5	35.2
2400	10.9	18.7	26.9	34.7	29.4	26.7	23.5	20.1	37.2
2600	12.7	19.9	28.0	36.6	31.9	29.0	25.4	21.1	39.1
2800	13.9	21.4	30.1	38.5	33.2	29.0	25.5	21.3	40.6
3000	15.2	22.8	31.5	41.1	34.9	29.0	25.7	21.6	42.8
3200	16.7	23.4	31.5	41.8	36.2	29.1	27.4	22.0	43.5
3400	18.3	24.6	32.5	43.8	38.0	30.7	28.3	22.3	45.4
3600	19.9	26.0	33.8	45.5	39.9	32.9	29.5	22.6	47.1
4000	22.0	27.9	36.0	50.3	43.2	35.8	33.1	23.1	51.4
4400	25.3	29.5	38.0	52.5	46.1	37.9	35.0	23.5	53.7
5000	28.6	33.1	40.6	53.4	50.0	41.5	38.6	24.9	55.5

2m distance

	Without background noise weighted [dB(A)]								
RPM	63Hz	125Hz	250Hz	500Hz	1kHz	2kHz	4kHz	8kHz	Total
800	-	-	13.4	15.7	4.7	13.5	13.4	12.7	21.0
1200	-	-	15.6	21.2	21.9	18.9	13.7	13.7	26.5
1600	-	-	15.8	21.7	21.9	19.4	16.7	14.6	27.0
2000	-	11.7	20.7	25.4	26.3	19.9	18.6	15.4	30.5
2200	-	13.0	21.5	28.9	26.9	20.4	20.0	16.2	32.2
2400	-	16.3	24.6	30.8	30.2	20.6	21.2	16.9	34.6
2600	11.5	17.8	26.8	33.7	32.3	24.6	22.9	17.6	37.1
2800	12.4	18.4	27.9	35.6	34.2	24.7	24.0	18.2	38.8
3000	14.2	20.1	29.1	38.1	37.3	28.5	26.4	20.6	41.5
3200	15.2	20.8	29.1	39.8	38.3	28.9	26.8	21.3	42.7
3400	17.7	22.1	30.6	41.8	40.0	29.7	27.4	21.9	44.5
3600	18.7	23.2	31.5	43.4	41.8	31.5	29.3	22.4	46.1
4000	21.1	25.0	33.6	46.8	44.5	33.8	31.5	23.0	49.2
4400	23.4	26.9	35.3	50.1	47.4	36.1	34.2	23.5	52.3
5000	27.8	32.1	38.2	54.1	51.8	39.8	37.5	24.8	56.4

Dimensions

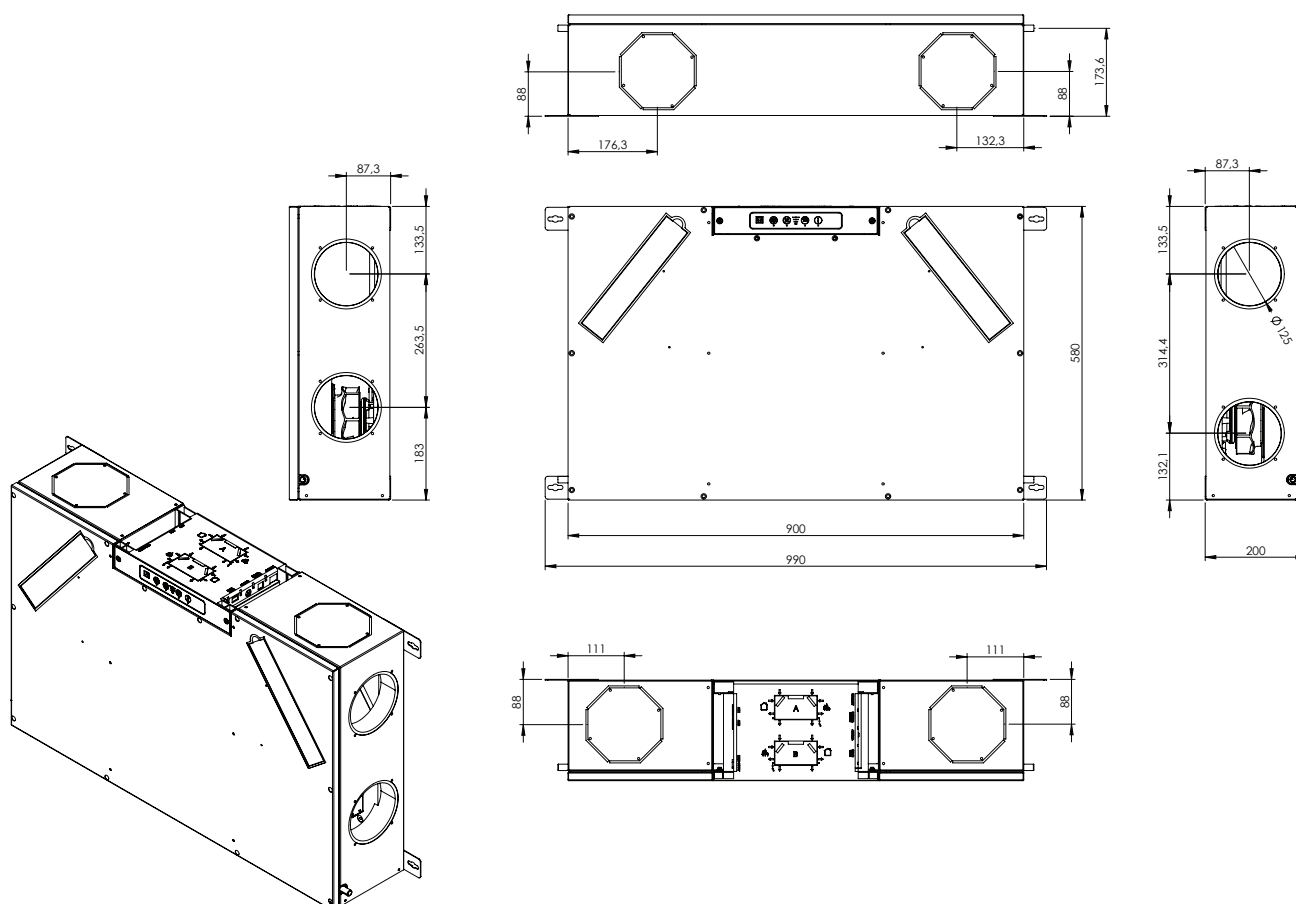

REVIT

Revit files are available for free on request.
Contact your local supplier or Dantherm for access.

DENMARK

Dantherm Denmark A/S
DK-7800 Skive
+45 96 14 37 00
sales.dk@danthermgroup.com

GERMANY

Dantherm GmbH
22844 Norderstedt
+49 40 526 8790
sales.de@danthermgroup.com

Trotec GmbH

52525 Heinsberg
+49 2452 962-0
vertrieb.de@danthermgroup.com

ITALY

Dantherm Group S.p.A.
37010 Pastrengo (VR)
+39 045 6770533

62012 Civitanova Marche (MC)
+39 0733 714368
sales.it@danthermgroup.com

SPAIN

Dantherm Group SP SAU
28108 Alcobendas, Madrid
+34 91 661 45 00

46980 Paterna, Valencia
+34 961 524 866
sales.es@danthermgroup.com

UNITED KINGDOM

Dantherm Group Ltd
Maldon CM9 4XD
+44 (0)1621 856611
sales.uk@danthermgroup.com

FRANCE

Dantherm Group SAS
69694 Vénissieux Cedex
+33 4 78 47 11 11
sales.fr@danthermgroup.com

POLAND

Dantherm Group Sp. z o.o.
62-023 Gądko
+48 61 65 44 000
sales.pl@danthermgroup.com

NORWAY

Dantherm Group AS
3138 Skallestad
+47 33 35 16 00
sales.no@danthermgroup.com

SWEDEN

Dantherm Group AB
602 13 Norrköping
+46 (0)11 19 30 40
sales.se@danthermgroup.com

SWITZERLAND

Dantherm Group AG
CH-5405 Baden Dättwil
+41 43 500 00 50
sales.ch@danthermgroup.com

Contact:

KEEP UPDATED
FOLLOW US ON:



danthermgroup.com